



GENERATORS

INVERTERS
PETROL
DIESEL

GUARANTEED TOUGH.®

INVERTER GENERATOR



FEATURES

- A** Light and powerfull pure sine wave models
- B** Ideal for any electronic device
- C** Electric start for DXGNI35E, DXGNI42E
- D** Powerful OHV petrol engines, stage V compliant
- E** Super Silent models for use in convenient environemet
- F** Resistant to inductive tools for professional use

SPECIFICATIONS

	DXGNI20E	DXGNI35E	DXGNI42E
RATED POWER	1,8 Kw	3,2 Kw	3,8 Kw
PEAK POWER	2,0 Kw	3,4 Kw	4,2 Kw
VOLTAGE	230v	230v	230v
FREQUENCY	50 Hz	50 Hz	50 Hz
POWER FACTOR	1	1	1
ENGINE MODEL	DW80i	DW160-ViE	DW175-ViE
ENGINE TYPE	OHV Single Cylinder, 4 stroke	OHV Single Cylinder, 4 stroke	OHV Single Cylinder, 4 stroke
DISPLACEMENT	80 cc	163 cc	175 cc
STARTING SYSTEM	Recoil	Electric / Recoil	Electric / Recoil
FUEL TYPE	Petrol Unleaded	Petrol Unleaded	Petrol Unleaded
FUEL TANK CAPACITY	5 L	8 L	8 L
AUTONOMY @50/100% LOAD	7,5 h	7,5 h	7,5 h
OIL TANK CAPACITY	0,35 L	0,45 L	0,45 L
SOUND LEVEL @25% LOAD AT 7M / (LWA)	57 dBA / 82 Lwa	58 dBA / 83 Lwa	58 dBA / 83 Lwa
NET/GROSS WEIGHT	21/24 Kg	28/32 Kg	30/33 Kg
Package Dimentions	558x370x515 mm	580x345x520 mm	580x385x525 mm
Loading Capacity FCL20'/40'HC	240/425 units	147/408 units	135/360 units
EAN code	8435528162879	8435528162886	8435672786310



PETROL GENERATOR



FEATURES

- A** Long lasting OHV petrol engines for intensive use
- B** Copper alternator winding
- C** Digital display with hourmeter for maintenance control
- D** Wheels included in all models
- E** Extra tank fuel capacity for 20/28 liters for long autonomy

SPECIFICATIONS

	DXGNP30E	DXGNP35E/351E	DXGNP65E/651E
RATED POWER	2,7 Kw	3,2 Kw	6,0 Kw
PEAK POWER	3,0 Kw	3,5 Kw	6,5 Kw
VOLTAGE	230v	230v	230v
FREQUENCY	50 Hz	50 Hz	50 Hz
POWER FACTOR	1	1	1
ENGINE MODEL	DW210	DW225	DW420
ENGINE TYPE	OHV Single Cylinder, 4 stroke	OHV Single Cylinder, 4 stroke	OHV Single Cylinder, 4 stroke
DISPLACEMENT	212 cc	223 cc	420 cc
STARTING SYSTEM	Recoil	Recoil / Electric	Recoil / Electric
FUEL TYPE	Petrol Unleaded	Petrol Unleaded	Petrol Unleaded
FUEL TANK CAPACITY	20 L	20 L	28 L
AUTONOMY @50/75% LOAD	19 / 14 h	16 / 12 H	10,6 / 9 h
OIL TANK CAPACITY	0,55 L	0,55 L	1,1 L
SOUND LEVEL @25% LOAD AT 7M / (LWA)	68 dBA / 92 Lwa	68 dBA / 92 Lwa	72 dBA / 96 Lwa
NET/GROSS WEIGHT	46-50 Kg	53/56 Kg	85/91 Kg
PRODUCT DIMENTIONS	590x460x510 mm	590x460x510 mm	696x553x628 mm
PACKAGE DIMENTIONS	603x485x530 mm	603x485x530 mm	720x570x633 mm
LOADING CAPACITY FCL20'/40'HC	160/425 units	160/425 units	90 / 254 units
EAN CODE	8435528162893	8435528162909	8435528162916



PETROL GENERATOR




SPECIFICATIONS

	DXGNP85E	DXGNP853E	DXGNP1103E
RATED POWER	8,0 Kw	10 Kva / 7,2 Kw	13,75 Kva / 10 Kw
PEAK POWER	8,5 Kw	10,6 Kva / 7,6 Kw	15 Kva / 10,8 Kw
VOLTAGE	230v	400/230v	400/230v
FREQUENCY	50 Hz	50 Hz	50 Hz
POWER FACTOR	1	0,8 / 1	0,8 / 1
ENGINE MODEL	DW460E	DW460E	DW740E
ENGINE TYPE	OHV Single Cylinder , 4 stroke	OHV Single Cylinder , 4 stroke	OHV Single Cylinder , 4 stroke
DISPLACEMENT	456 cc	456 cc	744 cc
STARTING SYSTEM	Recoil / Electric	Recoil / Electric	Electric
FUEL TYPE	Petrol Unleaded	Petrol Unleaded	Petrol Unleaded
FUEL TANK CAPACITY	28 L	28 L	pendent
AUTONOMY @50/75% LOAD	9,8 / 8,1 h	9,8 / 8,1 h	pendent
OIL TANK CAPACITY	1,1 L	1,1 L	pendent
SOUND LEVEL @25% LOAD AT 7M / (LWA)	72 dBA / 96 Lwa	72 dBA / 96 Lwa	pendent
NET/GROSS WEIGHT	87/93 Kg	89/95 Kg	pendent
PRODUCT DIMENTIONS	696x553x628 mm	696x553x628 mm	pendent
PACKAGE DIMENTIONS	720x570x633 mm	720x570x633 mm	pendent
LOADING CAPACITY FCL20'/40'HC	90 / 254 units	90 / 254 units	pendent
EAN CODE	8435528162923	8435528162978	pendent

FEATURES

- A** Full Power models DXGNP853 and DXGNP1103E for 400/230v output (100/90%)
- B** Silent model DXGNP1103E with V Twin powerfull engine
- C** Long lasting OHV petrol engines for intensive use
- E** Copper alternator winding
- D** Digital display with hourmeter for maintenance control
- E** Wheels included in all models
- F** Extra tank fuel capacity for 28 liters for long autonomy

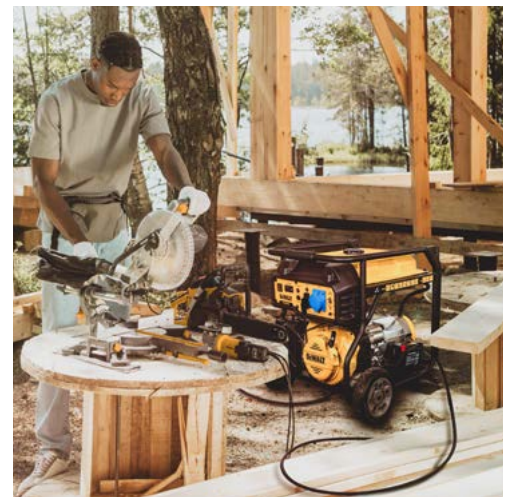



Manufactured under license by:

KAT POWER International SL

Camí de la bòbila s/n

T +34 972 53 85 21

info@itcpower.com

17771 Santa Llogaia d'Àlguema
SPAIN

DEWALT® and GUARANTEED TOUGH.® are trademarks of Stanley Black & Decker, Inc. and used under license by KAT POWER International SL.

All rights reserved. Neither this catalogue nor its text, illustrations, drawings or any part thereof, may be reproduced, stored in a retrieval system photocopied, recorded or transmitted in any form, whether electronic or otherwise, without our consent. To the best of our knowledge, all descriptions and illustrations contained in this catalogue are correct at the time of going to print. We cannot, however, be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification. © DEWALT® 2024.

1-800-4-DEWALT???

www.DEWALT.com