

Perkins P-1100

Prime1000 KVA
3 Phase

50 Hz

60 Hz

1100KVA
3 Phase

GENERATING SET MODEL (Perkins P-1100)

Output Ratings	Prime	Standby
380-415 V, 3 ph, 50 Hz, 1500 rpm	1000 KVA	1100 KVA
	800 KW	880 KW
380-415 V, 3 ph, 60 Hz, 1800 rpm	1100KVA	1197 KVA
	880 KW	878 KW

ENGINE/TECHNICAL DATA

Ratings at 0.8 Power Factor	
Engine Make	Perkins
Engine Model	4008TAG2A
Governing Type	Electronic
Number of Cylinders	8
Cylinder Arrangement	Vertical in Line
Bore and Stroke mm	160 x 190
Displacement / Cubic Capacity litres	30.56
Induction System	Turbocharged and air to air charge cooled
Cycle	4 stroke
Combustion System	Direct Injection
Compression Ratio	13.6:1
Rotation Anti-clockwise,	viewed from flywheel end
Cooling System	Water - cooled

Frequency and Engine Speed	50Hz & 1500rpm	60Hz & 1800rpm
Gross Engine Power kW (hp)	882 (1183)	969 (1299)
Fuel Consumption @ 50% load L/hr	111	108
@75% load L/hr	162	162
@100% load L/hr	215	224
Total Lubrication System Capacity litres	153	153
Total Coolant Capacity litres	162	162
Exhaust Temperature: °C	438	465
Fuel Tank Capacity: litres	N/A	N/A

ALTERNATOR DATA

Make	UPS / Leroy Somer
Model	UPS404J/ TAL049 E
No. of bearings	1
Insulation class	H
Wires	6/12
Ingress Protection	Ip23
Winding Pitch	2/3
AVR Model	
Overspeed	2250 mn-1
Voltage Regulation (steady)	± 0.5%

CONTROL PANEL

Model	7000 SERIES
-------	-------------

The DSE 7000 Series is an Auto Start Control Module for single genset applications. It includes a backlit LCD display which clearly shows the status of the engine all the times. This module can either be programmed using the front panel or by using the DSE configuration suite PC software.

Metering and Alarm indications:

- Generator frequency
- Underspeed, Overspeed
- Generator volts (L-L, L-N)
- Generator current
- Engine oil pressure
- Engine coolant temperature
- Fuel level (Warning or shutdown) - Optional
- Hours run counter
- Battery volts
- Fail to start/stop
- Emergency stop
- Failed to reach loading voltage/frequency
- Charge fail
- Loss of magnetic pick-up signal - Optional
- Low DC voltage
- CAN diagnostics and CAN fail/error
- Low DC voltage



1. ENGINE

Perkins four stroke heavy duty high performance industrial type diesel engine.

2. ENGINE FILTRATION SYSTEM

- Cartridge type dry air filter.
 - Two Cartridge type fuel filters.
 - Full flow lube oil filter.
- All filters have replaceable elements.

3. COOLING RADIATOR

Radiator and cooling fan, complete with safety guards, designed to cool the engine at high ambient temperatures (consult your dealer for de-rating factors)

4. EXHAUST SYSTEM

Exhaust gas flow 31.3 (m³/min)
Maximum allowable back pressure 18.0 (kPa)

5. CIRCUIT BREAKER TYPE

3 pole MCCB. (4 pole is optional)

6. FUEL SYSTEM

The baseframe design is incorporated with an integral fuel tank with a capacity of approx. 8 hours running at Full Load. The tank is supplied complete with fill cap breather, fuel feed and return lines to the Engine and drain plug.

7. ALTERNATOR

7.1 INSULATION SYSTEM

- The insulation system is Class H.
- All windings are impregnated in either a triple dip thermosetting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyester resin.
- Heavy coat of antitracking varnish additional protection against moisture or condensation.

7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains the Voltage Regulation at $\pm 1\%$. Nominal adjustment by means of a trim pot incorporated on the AVR.

8. MOUNTING ARRANGEMENT

8.1 COUPLING

The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

8.2 ANTI-VIBRATION MOUNTING PADS

Anti-Vibration pads are affixed between the Engine / Alternator feet and the Baseframe thus ensuring complete vibration isolation of the rotating assembly.

8.3 SAFETY GUARDS

The Fan & Fan Drive along with the Battery Charging Alternator are Safety Guard protected for personnel protection

9. FACTORY TEST

- The Generating set is load tested before dispatch
- All protective devices control functions and site load conditions are simulated. The generator and it's systems are checked before dispatch.

10. EQUIPMENT FINISHING

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability.

11. DOCUMENTATION

Operation & Maintenance manual, Circuit wiring diagrams and Commissioning / Fault Finding instruction leaflets are accompanied with the Generator.

12. QUALITY STANDARDS

The equipment meets the following standards: BS4999, BS5000, BS5514 IEC 60034, VDE0530, NEMA MG 1.22 and ISO 8528.


13. WARRANTY

All of the Generating Sets are covered under a warranty policy for a period of 12 months or 1000 working hours. Warranty of the equipment is in line with manufacturers warranty terms & conditions. (check warranty statement for more details, as it may vary for different countries)


In line with continuous product development, we reserve the right to change specifications without notice.

DIMENSIONS AND WEIGHT

Standard Generator

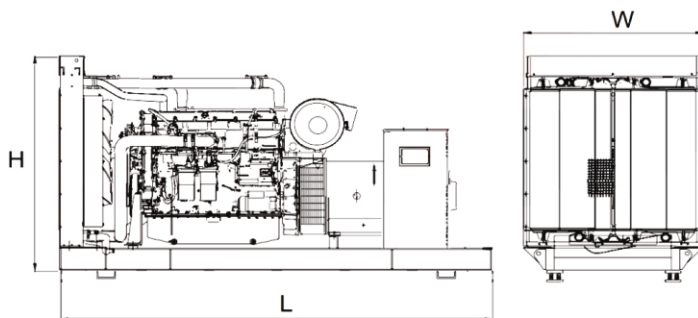

Generator with Soundproof Canopy

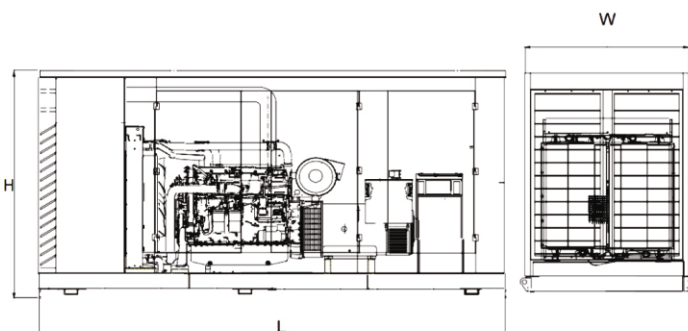

Length, L	4.689 m
Height, H	2.391 m
Width, W	2.070 m
Weight, Total	6600 kg

Length, L	6.00 m
Height, H	2.610 m
Width, W	2.440 m
Weight, Total	7334 kg